

VIEWBOARD ViewBoard IFP7533

Key Features


 Integrated with myViewBoard software

Multi-tasking capabilities for enhanced lesson delivery
Embrace simplicity and organization with the USB-C one-cable solution, offering 65W of Power Delivery.
Intuitive user interface and fast app launch for smooth operation

Powered by Android 11 Product **Description**



The ViewBoard IFP33 Series harmonizes a touch display with versatile software to create a comprehensive classroom solution for interactive and engaging learning. This interactive flat panel delivers exceptional image quality in 4K UHD, thanks to cutting-edge bonding technology that provides clearer colors, enhanced contrast, and reduced glare. The 40-point touchscreen interface, equipped with Ultra Fine Touch Technology, empowers students and teachers to collaborate seamlessly, using either their fingers or dual-tip pens, for an intuitive pen-on-paper experience. Powerful built-in front-facing speakers and a USB-C port sort out for a complete and convenient multimedia experience. The ViewBoard IFP33 Series is preinstalled with myViewBoard to offer advanced lesson delivery options for teachers and powerful device management tools for administrators.

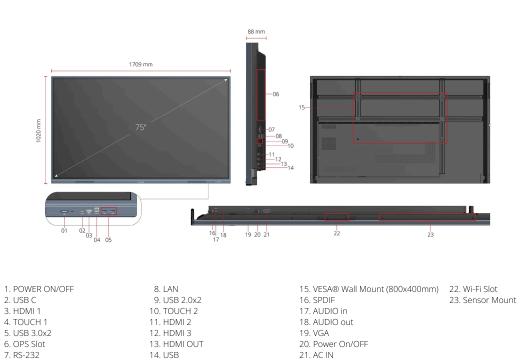

Visit Us www.viewsonic.com

ViewSonic ViewBoard IFP7533 ViewBoard® 75" 4K Interactive Display - Datasheet - ViewSonic Global

DISPLAY		BUNDLE SOFTWARE	
Panel Size:	75"	Basic Annotation Software:	myViewBoard Whiteboard
Panel Type:	TFT LCD Module with DLED Backlight. IPS	Pro Annotation Software: Wireless Presentation:	myViewBoard for Windows (Embedded in optional Windows Slot-in PC)
Display Area (mm):	1649.664(H) × 927.936(V) (74.6"		
Acrest Patie:	diagonal) 16:9		myViewBoard Display
Aspect Ratio: Resolution:		Wireless Presentation with Touch Feedback: Viewboard Cast:	Yes
	UHD 3840x2160(Pixels)	SPECIAL FEATURES	
Colors:	1.07B colors	All-in-one USB port:	(combine slot-in PC/Android/HDMI USB port) Front "SmartPort™ USB" to all channels.
Brightness:	350 nits		
Contrast Ratio:	5000:1 (max. with DCR enabled)	Simple LAN sharing between IFP	USB" to all channels.
Response Time:	8ms	and slot-in device:	Slot-in PC
Viewing Angles:	H=178, V=178	Light Sensor:	Yes
Backlight Life:	50,000 Hours (8 hours of	POWER	
Ŭ	use per day)	Voltage:	100-240V AC
Surface Treatment:	Hardness: 7H Anti-glare coating	Consumption:	On:106W; Off: ≤ 0.5W
Orientation:	Landscape	ERGONOMICS	
PLATFORM		Wall Mount (VESA®):	800x400
Processor:	Quad-core ARM Cortex	OPERATING CONDITIONS	
	(A55*4)	Temperature (° C):	0°C to 40°C
RAM:	4GB DDR4	Humidity:	20% ~ 80% RH non-
Storage:	32 GB		condensing
тоисн		DIMENSIONS (W X H X D)	1700 - 1000 - 00
Type/ Tech:	Ultra Fine Touch Technology	Physical (inch / mm):	1709 x 1020 x 88 mm / 67.3 x 40.2 x 3.5 in
Touch Point:	40 points touch	Packaging (inch / mm):	1863 x 1140 x 225 mm / 73.3x 44.9 x 8.6 in
INPUT		WEIGHT	
HDMI:	HDMI-IN 2.0 x 3 (3840x2160 @60Hz)	Net (lb / kg):	104.3lb/47.3kg
RGB / VGA:	x1	Gross (lb / kg):	133.5lb/60.55kg
Audio:	x1	REGULATIONS	
RS232:	x1	FCC/ICES003, EPEAT, CE EMC, LVD or CB, RoHS Green BOM & RoHS DoC, ErP, REACH SVHC List & DoC, EEL,	
OPS:	x1 (Optional Intel Standard OPS)		
	x1 (Optional VB-WIFI-	PACKAGE CONTENTS	
WiFi: OUTPUT	002/VB-WIFI-004/VSB- 050)	1. 3m power cord by ship area 2. Remote control with AAA battery 3. 3m touch USB cable 4. Touch pen x 2 (VB-PEN- 009) 5. Quick Start Guide + Compliance statement 6. RS232 adapter 7. Clamp x 5 8. Camera Plate 9. Screw x 8 (camera	
HDMI:	HDMI 2.0 x1	2+2, wall mount 4) 10. HDMI cabl	e 3m
Audio:	x1		
		VPC2-O series/VPC2-O-1B series	/VPC12-WPO-15/16
SPDIF:	x1		
LAN			
RJ45:	x2		
USB			
Туре А:	USB3.0 x4 (Front x2, Rear x2); USB2.0 x1		
Туре В:	x2 (Front x1, Rear x1)		
Туре С:	Frontx1 (PD65W + DP1.2 + Data USB2.0 + 10M/100M sharing)		

SPEAKERS

16W x 2

TOP CAMERA PLATE

Yes

EMBEDDED OS

Android 11

Copyright $\ensuremath{\mathbb{C}}$ ViewSonic Corporation 2000-2024. All rights reserved.