# ViewBoard® 75" 4K Interactive Display



**IFP7530** 



- UFT (Ultra Fine Touch) Technology
- myViewBoard<sup>™</sup> digital whiteboard software
- Dual-pen writing with 3mm/8mm diameter pen tips
- Ambient Light Sensor
- ENERGY STAR® certified

The ViewBoard® IFP30 series embraces UFT (Ultra Fine Touch) Technology to offer more precise writing and faster processing time than traditional IR panels. 2mm height sensitivity increases writing accuracy while allowing for dual-pen annotation with both 3mm & 8mm diameter pens. It's also incredibly responsive, distinguishing the different touch diameters among pens, fingers and palms to avoid false strokes. In addition, the IFP30 series is integrated with myViewBoard™ digital whiteboard software to provide collaboration on the go, and is further complimented by native casting including Miracast, Airplay, and Chromecast. Interactive whiteboards are becoming commonplace. The IFP30 series is the solution for schools and workplaces of all sizes and considerations.

#### **UFT Technology**

Ultra Fine Touch Technology produces a lag-free, pen-on-paper writing experience. Writing accuracy is greatly improved and student-teacher interaction flows more naturally thanks to

real-time response rates, dual-pen recognition and our new 3mm tipped pens.

3mm

#### **Dual-Pen**

Automatically detect pen diameter (8mm & 3mm) and write simultaneously with different colours and thicknesses.



#### **Full Native Performance on embedded OS**

Built-in  $myViewBoard^{\, \text{\tiny TM}}$  digital whiteboard software to collaborate on the go.



# **Wireless Content Sharing**

Content sharing with built-in ViewBoard @ Cast software.



## **Environmental Sustainability**


ENERGY STAR certified for increased energy efficiency.




# **Ambient Light Sensor**

Automatically adjust the brightness to relieve eye strain.

Intel OPS PC allows for efficient deployment and easy maintenance (Optional).

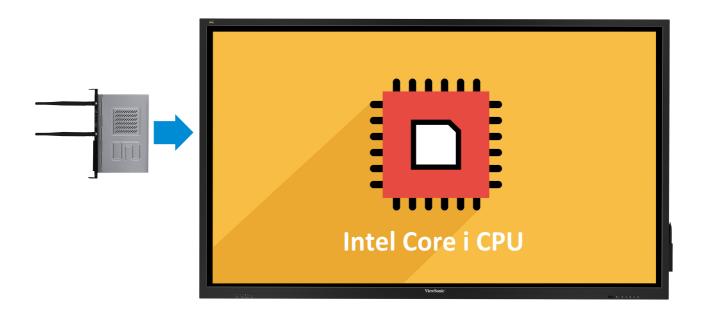

#### I/O Ports

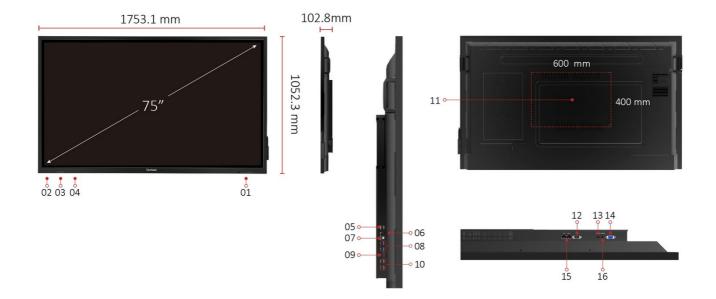

- 1. CONTROLS PANEL
- 2. USB X 2
- 3. TOUCH USB
- 4. HDMI IN
- 5. HDMI OUT
- 6. SPDIF OUT
- 7. TOUCH USB
- 8. USB X 2
- 9. DISPLAY PORT IN
- 10. HDMI IN X 2
- 11. VESA® WALL Mount 600x400 mm
- 12. RS232 IN
- 13. AUDIO OUT

- 14. VGA IN
- 15. LAN X 2
- 16. PC AUDIO IN

### **Technical Specifications**

Display	Panel Size	75"
	Type/Tech	IPS/V-by-one
	Display Area (mm)	1647.36*926.64mm
	Aspect Ratio	16:9
	<b>Native Resolution</b>	4K60hz
	Colours	10 bits
	Brightness	450(Typ.)
		400(min.)
	Contrast Ratio	1200:1
	Response Time	8ms(Type)
	Viewing Angles	H = 178, V = 178  typ.
	Backlight Life	30,000hr(min)
	<b>Surface Treatment</b>	Hardness: 7H
		Costing: AG coating Thickness: 4mm
	Porel	
	Bezel Orientation	29/29/29/49.7mm(btm.)  Landscape
Platform	Processor	ARM Cortex-A73*2 + Cortex-A53*2 1.5Hz
	RAM	3GB DDR4
	Storage	16GB
Touch	-	
	Type/ Tech Touch Resolution	IR Recognition 32767W*32767D
	Touch Point	
INPUT		20 points
	HDMI	Front*1 Rear* 2
		All ports HDMI2.0
	RGB / VGA	1
	DisplayPort	DP1.2*1
	Audio	PC audio in (3.5 mm)*1
	RS232	x1
	OPS	1
OUTPUT	HDMI	*1
	Audio	3.5mm Earphone Out *1, SPDIF*1
	SPDIF	x1
LAN	RJ45	*2
		10M/100
USB	Type A	USB2.0 *4 (Front:*2 Rear: *2 )
	Type B	For touch (Front*1, rear*1))
SPEAKERS	SPEAKERS	15WX2
Camera plate on top for	Camera plate on top for	yes
screw-in webcam	screw-in webcam	
installation	installation	

COMPATIBILITY	RGB PC/HDMI PC	VGA: 1080p HDMI: 4K
	HDMI	3840x2160
	DisplayPort	3840x2160
Embedded OS	Embedded OS	OS 8.0
Embedded OS	Embedded OS	Resolution: 1080p
Power	Voltage	PB model: 100-240VAC +/- 10% Wide Range
	Consumption	On: 115W(Typ.) Off: <0.5W
ERGONOMICS	Wall Mount (VESA® )	600x400
OPERATING	Temperature (º C)	0°C to 40°C
CONDITIONS	Humidity	20% ~ 80% RH Non-Condensing(working)
DIMENSIONS (W x H x D)	Physical (inch / mm)	1753.1*1052.3*102.8(mm) 69.02*41.43*4.05(inch)
	Packaging (inch / mm)	1880*1160*280(mm) 74*45*11(inch)
WEIGHT	Net (lb / kg)	135lb, 61.25kg
	Gross (lb / kg)	173.8lb, 78.85kg
REGULATIONS	REGULATIONS	EMC/CE-EU, CB-EU/IEC62368, RoHS Green BOM & RoSH DoC, REACH, WEEE (Doc & Disassebly report), ErP, EAC(local apply), UKrSEPRO(local apply), , BIS-India
<b>Energy Star version</b>	Energy Star version	YES
EEI rating	EEI rating	A+
PACKAGE CONTENTS	PACKAGE CONTENTS	<ol> <li>US/EU/UK/AU power cord , no PE bag</li> <li>QSG</li> <li>Compliance statement</li> <li>HDMI cable*1</li> <li>Touch USB cable *1</li> <li>Touch PEN *2. Extra tip: Thick*2, thin*1</li> <li>Remote control with AAA batteries (VS version)</li> <li>Webcam plate with screws pack</li> <li>Need to compatible with Logi CC4000e)</li> <li>Add screw holes on top of the frame</li> <li>Pen tray*1 (two pen, detachable, mount for both side)</li> <li>Wall mount screws</li> </ol>
Compatible Slot-in PC	Compatible Slot-in PC	VPC12 series