


# How to upgrade TP-LINK ADSL Modem Router

## (TrendChip Solution)

### Notice:


- **Please verify the hardware version of your device for the firmware version. Wrong firmware upgrading may damage your device and void the warranty.**




	Published Date	8/25/2010
	File Size	3.614 MB
	Operating System	Win98SE/Me/NT/2000/XP/2003/Vista/Windows 7/Linux
	Modifications and Bug Fixes	<ul style="list-style-type: none"><li>• Fix some problems about IPsec.</li><li>• Fix some bugs about IPoE.</li><li>• Fix display problem on wireless page.</li><li>• Add support to No-IP DDNS.</li><li>• Time can be set manually or sync with PC.</li></ul>
	Notes	

- After you downloaded the firmware from TP-LINK website, **please use decompression software such as WinZIP or WinRAR to extract the firmware file to a folder;**
- **Do NOT** upgrade the firmware via **wireless** connection unless the device does not have cable connection;
- **Do NOT** turn off the power or cut down the Ethernet cable during upgrade process;
- **Write down all the settings which you changed from the default values, since you may need to reenter them manually.**
- **Internet Explorer (IE) is recommended to upgrade the firmware.**

**Step 1** Log into the ADSL Modem Router by typing **http://192.168.1.1** in the address bar of the web browser (such as Internet Explorer, Firefox). **The Username and Password are both admin** unless you have changed it before.

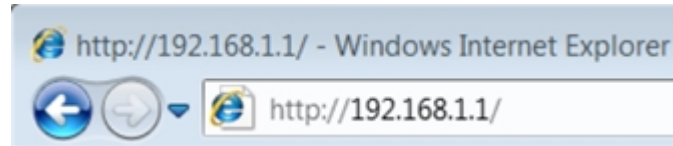

**Step 2** Click **Maintenance** -> **Firmware** click the **Browse** button to choose the firmware you already extracted in the folder.

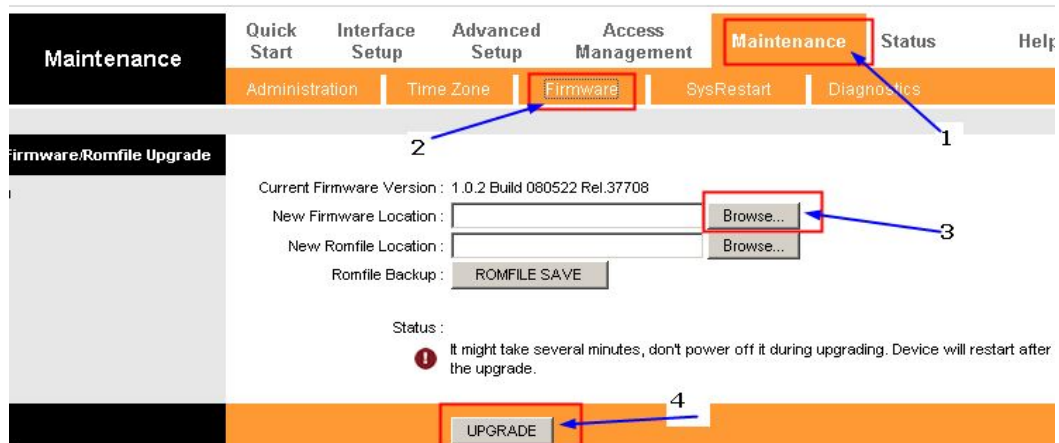

**Step 3** Click the **UPGRADE** button. The device will reboot automatically after the upgrading has been finished. Please wait about 3 minutes.

**Step 4** Click **Status**-> **Device Info**, verify that the router's firmware has been upgraded.



**Step 5** You have to restore the device to factory default to make the new functions take effect; Click **Maintenance**->**SysRestart**, choose **Factory Default Settings**, Click **RESTART** button.



**Step 6** After restoring factory default, please login <http://192.168.1.1> and re-enter the settings you have written down before upgrading.