


ADSL setup for TD-W8970

أفتح برنامج الانترنت الخاصه بك ,, google chrome ,, firefox

اكتب في شريط المواقع 192.168.1.1

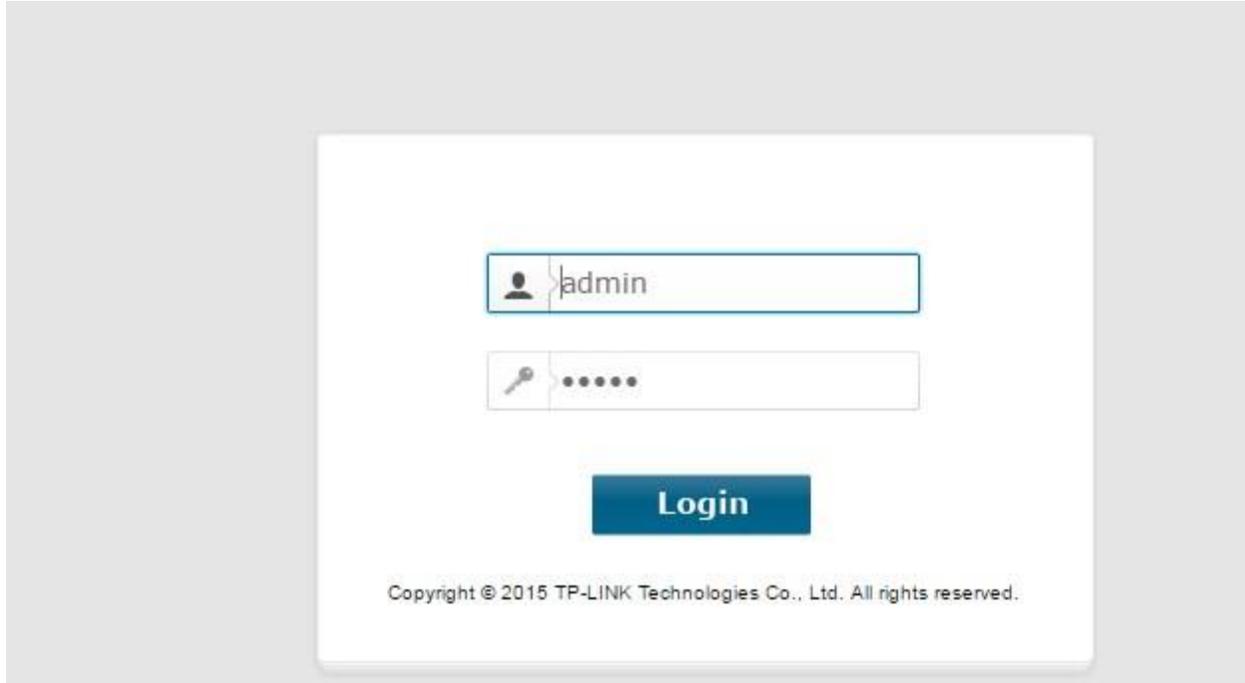

حتغتنح معاك الصفحه دي

TP-LINK® 300Mbps Wireless N USB ADSL2+ Modem Router
Model No. TD-W8968

Status

Basic Status

Device Information

Firmware Version: 0.6.0 1.1 v0005.0 Build 120926 Rel.27100n
Hardware Version: TD-W8968 v1 00000000
System up time: 0 day(s) 00:00:32

DSL

Line Status: Disconnected
DSL Modulation Type: Multimode
Annex Type: Annex A/I/J/L/M

	Upstream	Downstream
Current Rate (Kbps)	0	0
Max Rate (Kbps)	0	0
SNR Margin (dB)	0	0
Line Attenuation (dB)	0	0
Errors (Pkts)	0	0

WAN

Name	Connection Type	VPI/VCI	IP/Mask	Gateway	DNS	Status
------	-----------------	---------	---------	---------	-----	--------

TP-LINK®
300Mbps Wireless N Gigabit ADSL2+ Modem Router
Model No. TD-W8970

Quick Setup - Start
<p>This guide will help you set basic parameters for Internet connection. Please click NEXT to continue.</p> <p>For function or parameter details, please select the corresponding menu options on the left.</p> <p style="text-align: center;">Next</p>

TP-LINK®
300Mbps Wireless N Gigabit ADSL2+ Modem Router
Model No. TD-W8970

Quick Setup - Region and Time Zone
<p>Please select your region and time zone.</p> <p>Region <input type="text" value="Egypt"/></p> <p>Time Zone <input type="text" value="(GMT) Greenwich Mean Time: Dublin, Edinburgh, London, Lisbon"/></p> <p style="text-align: center;">Back Next</p>

Next أختار

TP-LINK®
300Mbps Wireless N Gigabit ADSL2+ Modem Router
Model No. TD-W8970

Quick Setup - Auto Detection
<p>Auto-Detect Connection Type:</p> <p>This Setup Wizard can detect the type of Internet connection you have. Do you want The Smart Setup Wizard to try and detect The connection type now?</p> <p> <input type="radio"/> Yes. <input checked="" type="radio"/> No. I want to configure The Internet Connection myself. </p> <p style="text-align: center;">Back Next</p>

Egypt أختار

TP-LINK®
300Mbps Wireless N Gigabit ADSL2+ Modem Router
Model No. TD-W8970

Quick Setup - Auto Detection
<p>Auto-Detect Connection Type:</p> <p>This Setup Wizard can detect the type of Internet connection you have. Do you want The Smart Setup Wizard to try and detect The connection type now?</p> <p> <input type="radio"/> Yes. <input checked="" type="radio"/> No. I want to configure The Internet Connection myself. </p> <p style="text-align: center;">Back Next</p>

No أختار

Status	Quick Setup - DSL
Quick Setup	
Operation Mode	Please select your ISP (Internet Service Provider) from the drop-down list. The VPI/VCI and connection type will be auto-configured according to your selection. If your ISP is not listed, please select "other" and set the parameters below manually.
Network	
IPTV	
DHCP Server	ISP: <input type="text" value="TE-Data"/>
Wireless	VPI: <input type="text" value="IM"/> (0-255)
Guest Network	VCI: <input type="text" value="LinkdotNet"/> (35)
USB Settings	<input type="text" value="TE-Data"/> (35)
Route Settings	Connection Type: <input type="text" value="Vodafone over Ethernet"/>
IPv6 Route Settings	
Forwarding	
Parent Control	

في خانه ISP اختار شركة الانترنت الخاصه بك

في حاله او النت المتوفر من شركة فودافون غير VPI لـ 7 و VPI 77

Status	Quick Setup - DSL
Quick Setup	
Operation Mode	Please select your ISP (Internet Service Provider) from the drop-down list. The VPI/VCI and connection type will be auto-configured according to your selection. If your ISP is not listed, please select "other" and set the parameters below manually.
Network	
IPTV	
DHCP Server	ISP: <input type="text" value="Vodafone"/>
Wireless	VPI: <input type="text" value="7"/> (0-255)
Guest Network	VCI: <input type="text" value="70"/> (1-65535)
USB Settings	Connection Type: <input type="text" value="PPPoA(PPP over ATM)"/>
Route Settings	
IPv6 Route Settings	
Forwarding	
Parent Control	

Status	Quick Setup - PPPoE
Quick Setup	
Operation Mode	Please enter the Username and Password. If the Username/Password are unknown, please contact your ISP.
Network	
IPTV	
DHCP Server	Username: <input type="text"/>
Wireless	Password: <input type="text"/>
Guest Network	Confirm password: <input type="text"/>
USB Settings	
Route Settings	
IPv6 Route Settings	
Forwarding	

في خانه username اكتب اسم المستخدم الخاص بخدمه الانترنت و خانه password اكتب كلمه السر الخاصه بخدمه الانترنت ثم اضغط Next

Status
Quick Setup
Operation Mode
Network
IPTV
DHCP Server
Wireless
Guest Network
USB Settings

Quick Setup - 3G/4G

Enable 3G/4G as a backup solution for Internet access

3G/4G can be set as a backup method for Internet Access. If you wish not to configure 3G/4G settings now, click Next and continue. Otherwise, enable the 3G/4G Backup to apply configurations.

Back

Next

إذا اردت تشغيل الراوتر ADSL + 3G اختار Enable 3G/4G Backup و اختار شركة الانترنت

أضغظ Next

Status
Quick Setup
Operation Mode
Network
IPTV
DHCP Server
Wireless
Guest Network
USB Settings
Route Settings
IPv6 Route Settings
Forwarding
Parent Control
Firewall

Quick Setup - Wireless

Wireless: Enable Disable

Wireless Network Name: (Also called SSID)

Channel:

Mode:

Security:

WPA/WPA2-Personal (Recommended)

Password:

(Enter ASCII characters between 8 and 63 or Hexadecimal characters between 8 and 64.)

Disable Wireless Security

Back

Next

في خانة wireless network name اكتب اسم اللوايرلس , في خانة password اكتب كلمة سر اللوايرلس

اضغظ Next

Status
Quick Setup
Operation Mode
Network
IPTV
DHCP Server
Wireless
Guest Network
USB Settings
Route Settings
IPv6 Route Settings
Forwarding
Parent Control
Firewall
IPv6 Firewall
IPv6 Tunnel
Bandwidth Control
IP & MAC Binding
Dynamic DNS
Diagnostic

Quick Setup - Confirm

The Quick Setup is complete. Please confirm all parameters below. Click BACK to modify any settings or click SAVE to save and apply your configurations.

Parameters Summary:

Region: Egypt

Time Zone: +00:00

DSL PVC: 0/35

Connection Type: PPPoE

Username: fgfg

Password: ***

3G/4G Backup: Disabled

Wireless: Enabled

Wireless Network Name(SSID): TP-LINK_29A36E

Channel: Auto

Mode: 11bgn mixed

Security: WPA/WPA2-Personal

Wireless Password: 79626972

Back

Save

- Status
- Quick Setup
- Operation Mode
- Network
- IPTV
- DHCP Server
- Wireless
- Guest Network
- USB Settings
- Route Settings
- IPv6 Route Settings
- Forwarding
- Parent Control
- Firewall
- IPv6 Firewall
- IPv6 Tunnel
- Bandwidth Control

Quick Setup - Complete

Note: If you are configuring the modem router wirelessly, changing the wireless settings will cause you to be disconnected from it. Please reconnect to the modem router using the new SSID(WIFI name) and password.

Setup Status:

- Time Zone Configuring:** Success
- Operation Mode Configuring:** Success
- WAN Connection Configuring:** Success
- 3G/4G Connection Configuring:** Success
- Gateway and DNS Configuring:** Success
- Wireless Configuring:** Success

Quick Setup is complete. Please click FINISH to exit.

Note: If the Modem Router still can not connect to the Internet, please click "Network > WAN Settings" menu on the left to confirm the WAN connection type and mode on the WAN Settings page.

Finish